


ITEM	DESCRIPTION	MATERIAL
1	TUBING NUT	300 Series SS
2	DOUBLE FERRULE	300 Series SS
3	SEAT SEAL	PTFE
4	SEALING O-RING	EPDM or Viton (Refer Note 9)
5	RAM-TYPE PLUG	300 Series SS
6	OPERATING SPRING	300 Series SS
7	E-CLIP	PH15-7 MO
8	RETAINER	300 Series SS
9	LOCK NUT	300 Series SS
10	THERMAL ACTUATOR	300 Series SS
11	VALVE BODY	300 Series SS

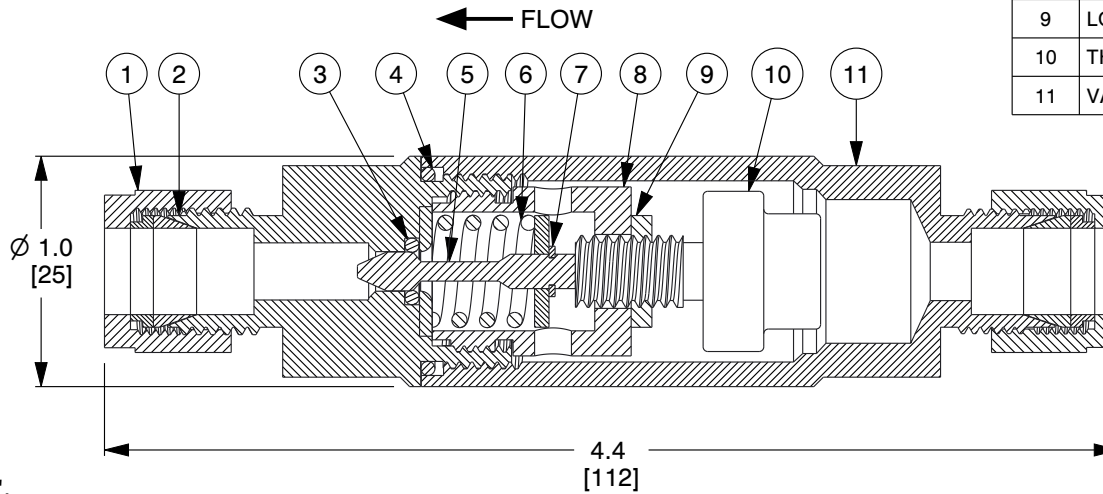

NOTES:

1. TUBE O.D SIZE: 3/8".
2. Cv: 0.5.
3. WEIGHT: 0.5 Lb (0.2 Kg).
4. MAXIMUM OPERATING PRESSURE: 150 PSIG (10 BAR).
5. MAXIMUM TEMPERATURE: 150°F (66°C) OVER SET-POINT-LIMIT 300°F (149°C).
6. FULL OPEN TEMPERATURE "XXX" AVAILABLE: 040°F, 045°F, 050°F, 060°F, 070°F, 075°F, 085°F, 095°F, 100°F, 105°F, 110°F, 115°F, 120°F, 125°F, 130°F, 140°F, 150°F, 160°F, 170°F, 175°F, 180°F, 190°F, 200°F, AND 210°F.
7. FITTINGS: PARKER A-LOK STANDARD / SWAGelok OPTIONAL.
8. REPLACE SINGULAR "X" WITH 0 FOR EPDM BODY SEALS ; 1 FOR VITON BODY SEALS.
9. SEAL MATERIAL COMPATIBILITY:
 - A. EPDM - AIR, WATER, STEAM, KETONES, AND SYNTHETIC HYDRAULIC OILS.
 - B. VITON - AIR, FUEL, OIL, GAS, PETROLEUM-BASED HYDRAULIC OILS.
10. A #20 MESH STRAINER IS RECOMMENDED.

COMPONENT	IN-LINE TEMPERATURE CONTROL VALVE
-----------	-----------------------------------

ThermOmegaTech
 ThermOmegaTech, Inc.
 353 Ivyland Road
 Warminster, PA 18974-2205, USA
 Ph: 215-798-5978

This file and any associated information and specifications are provided for reference and evaluation purposes only, and is subject to change without notice. ThermOmegaTech makes no representations, warranties or guarantees as to the appropriateness, accuracy, completeness, or suitability for any purpose, of the file, information or specifications. You are solely responsible for the use of the file, information or specifications.

This drawing is the property of ThermOmegaTech. It contains confidential, proprietary information that is ThermOmegaTech property. Do not disclose to or duplicate for others except as authorized by ThermOmegaTech.

SCALE NTS

223-110X00-XXX

3/8" TV/HAT-RA-SS-SW

UNIT
INCH [MM]
SHEET
1 of 1

4

3

2

1

B

B

A

A

4

3

2

1