


ITEM	DESCRIPTION	MATERIAL
1	VALVE BODY	Brass
2	THERMAL ACTUATOR	Brass
3	OPERATING SPRING	300 Series SS
4	RAM-TYPE PLUG	300 Series SS
5	SEAT FITTING	Brass
6	SEAT SEAL	BUNA
7	BODY SEAL	BUNA
8	CALIBRATION LOCKNUT	300 Series SS
9	SEAT RETAINER	Brass
10	SEAT INSERT	Brass

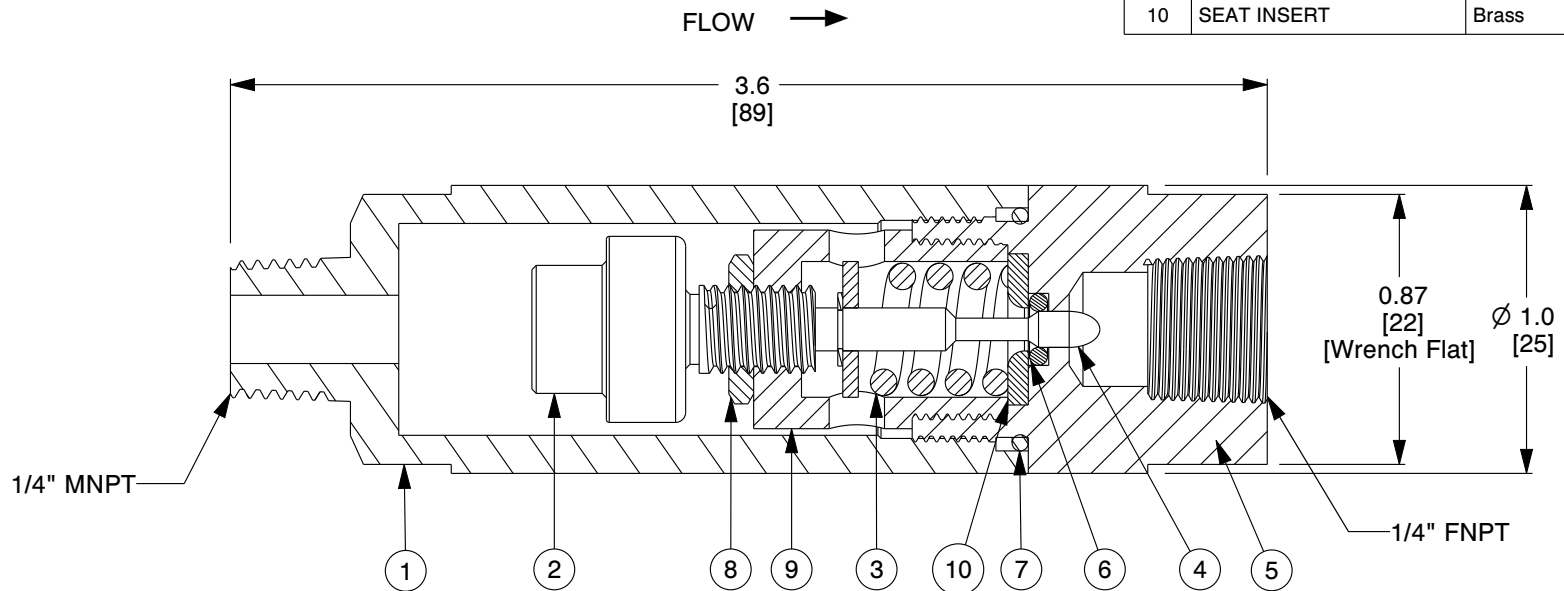

**NOTES:**

1. Cv: 0.5.
2. WEIGHT: 0.4 Lb (0.2 Kg).
3. MAXIMUM OPERATING PRESSURE: 300 PSIG (20.7 BAR).
4. MAXIMUM TEMPERATURE: 250°F (121°C).
5. FULL OPEN TEMPERATURES "XXX" AVAILABLE: 040°F, 045°F, 050°F, 060°F, 070°F, 075°F, 085°F, 095°F, 100°F, 105°F, 110°F, 115°F, 120°F, 125°F, 130°F, 140°F, 150°F, 160°F, 170°F, 175°F, 180°F, 190°F, 200°F AND 210°F.
6. CLOSING TEMPERATURE IS TYPICALLY 10°F BELOW OPENING TEMPERATURE.
7. A #20 MESH STRAINER IS RECOMMENDED.

COMPONENT	PUMP THERMAL RELIEF VALVE
-----------	---------------------------

**ThermOmegaTech**  
 ThermOmegaTech, Inc.  
 353 Ivyland Road  
 Warminster, PA 18974-2205, USA  
 Ph: 215-798-5978

This file and any associated information and specifications are provided for reference and evaluation purposes only, and is subject to change without notice. ThermOmegaTech makes no representations, warranties or guarantees as to the appropriateness, accuracy, completeness, or suitability for any purpose, of the file, information or specifications. You are solely responsible for the use of the file, information or specifications.

This drawing is the property of ThermOmegaTech. It contains confidential, proprietary information that is ThermOmegaTech property. Do not disclose to or duplicate for others except as authorized by ThermOmegaTech.

SCALE      NTS

**242-000000-XXX**

1/4" ECONO/HAT-RA M/F

UNIT	INCH [MM]
SHEET	1 of 1