

4

3

2




1

B

B

A

A

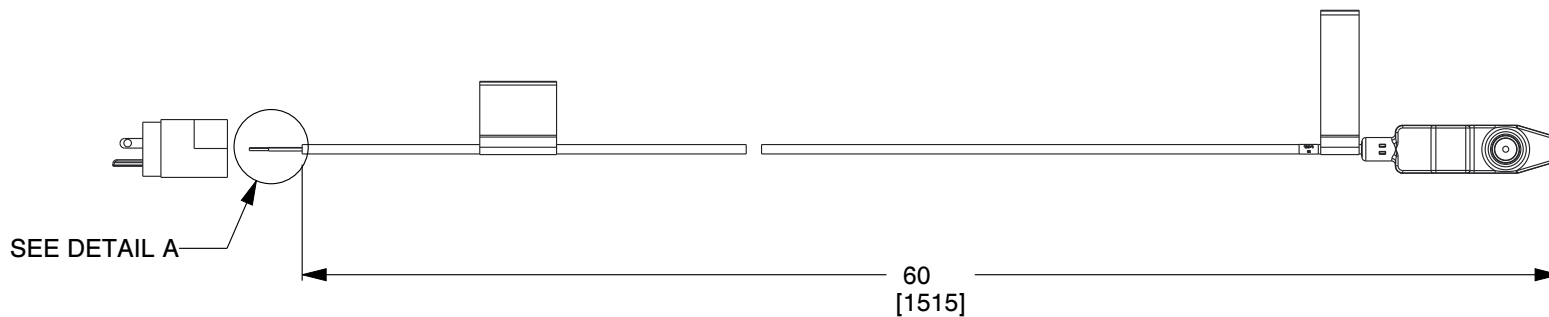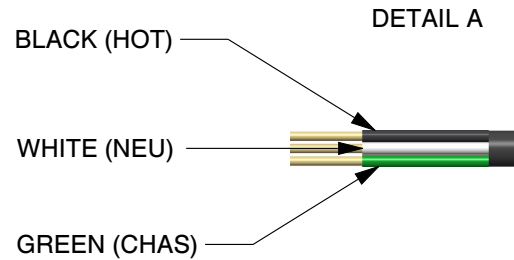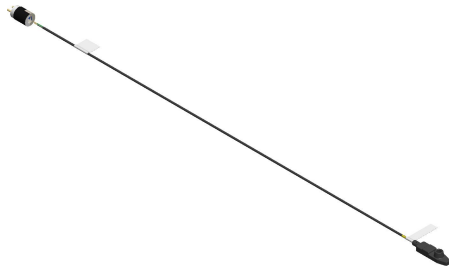

**NOTES:**

1. 120VAC/74VDC WIRE HOOK UP.
2. MAXIMUM CURRENT: 0.185A.
3. MAXIMUM WATTAGE: 22W.
4. TYPICAL WATTAGE: 5.5W.
5. FULLY ENCAPSULATED PC BOARD.
6. NO MOVING PARTS TO WEAR.
7. MINIMAL ELECTRICAL NOISE.
8. EASY INSTALLATION/REMOVAL WITH ONE HAND OR GLOVES.

<b>COMPONENT</b>	PASSENGER CAR POTABLE WATER SYSTEM FREEZE PROTECTION
------------------	---------------------------------------------------------

**ThermOmegaTech**  
 ThermOmegaTech, Inc.  
 353 Ivyland Road  
 Warminster, PA 18974-2205, USA  
 Ph: 215-798-5978

This file and any associated information and specifications are provided for reference and evaluation purposes only, and is subject to change without notice. ThermOmegaTech makes no representations, warranties or guarantees as to the appropriateness, accuracy, completeness, or suitability for any purpose, of the file, information or specifications. You are solely responsible for the use of the file, information or specifications.

This drawing is the property of ThermOmegaTech. It contains confidential, proprietary information that is ThermOmegaTech property. Do not disclose to or duplicate for others except as authorized by ThermOmegaTech.

**SCALE**      NTS

**455-000000-060**

120VAC/74VDC HEATER CABLE WITH PLUG  
END (NEMA 5-15)

<b>UNIT</b>
INCH [MM]
<b>SHEET</b>
1 of 1

4

3

2

1