


ER E ION
F, LF
S LF
SS
l

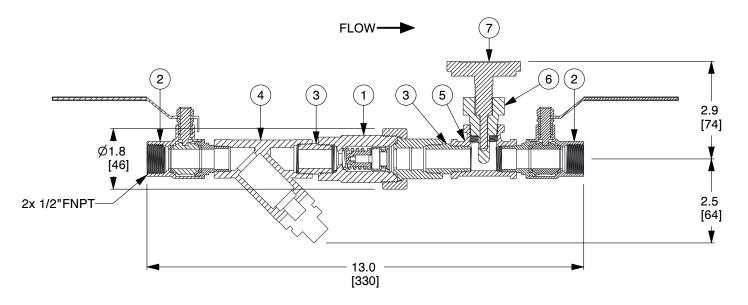

NOTES:

Α

В

- 1. Cv: OPEN: 1.3, CLOSED: 0.2, DESIGN: 0.60.
- 2. WEIGHT: 3.2 Lbs (1.5 Kg).
 3. MAXIMUM WORKING PRESSURE: 200 PSIG (14 BAR).
 4. MAXIMUM WORKING TEMPERATURE: 250°F (121°C).
- 5. XXX REFERS TO THE DESIRED CLOSING TEMPERATURE IN °F.
- 6. ALL COMPONENTS ARE NSF/ANSI 61 AND NSF 372 CERTIFIED IN DOMESTIC WATER SYSTEMS.



ThermOmegaTech, Inc. 353 Ivyland Road Warminster, PA 18974-2205, USA Ph: 215-798-5978

are provided for reference and evaluation purposes only, and is subject to change without notice. ThermOmegaTech makes no representations, warranties or guarantees as to the appropriateness, accuracy, completeness, or suitability for any purpose, of the file, information or specifications. You are solely responsible for the use of the file, information or specifications.

This file and any associated information and specifications

This drawing is the property of ThermOmegaTech. It contains confidential, proprietary information that is ThermOmegaTech property. Do not disclose to or duplicate for others except as authorized by ThermOmegaTech.

> **SCALE** NTS

CIRCUITSOLVER UNION STRAINER ASSEMBLY WITH THERMOMETER

CSUAS-1/2-XXX-TW

COMPONENT

1/2" - CSUAS WITH THERMOMETER

1

SHEET 1 of 1

UNIT

INCH [MM]

2 3